

Lumen Tech

Lighting, LLC.

Design QAD20

Slip-Fitter / Wall Mount Adjustable Area Light
Maximum 175W Metal Halide
Or 150W High Pressure Sodium

Specifications

Housing: Die cast aluminum construction with corrosion resistant hardware. 2-3/8" Tenon adjustable slip-fitter mount. Optical housing swivels from 0 to 30 degrees to aim light where it's needed. See finish note.

Door Frame: Die cast aluminum, one piece silicone gasket, seals door frame to housing. See finish note.

Lens: Impact resistant clear tempered glass, silicone caulked to door frame.

Reflector: Anodized aluminum, designed for maximum efficiency, type V, III or forward throw distribution.

Ballast: Pre-wired C.W.A., H.P.F. core and coil with capacitor.


Lamp: Clear medium base, (by others).

Lamp Holder: High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact.

Finish: Bronze, black, white or gray detergent cleaned, prime coated. Chip resistant powder urethane polyester coating.

Photometric Information: Contact factory.

Labels: Rated IP65, U/L listed suitable for wet location.

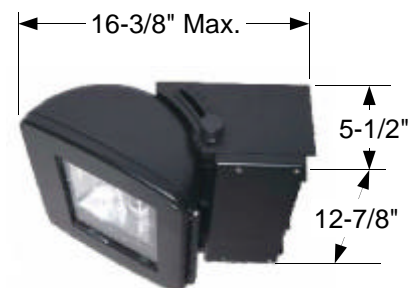

Ordering Information

Catalog Number	Watts	Light Source
Type V Distribution		
QAD20V100H	100	HPS
QAD20V150H	150	HPS
QAD20V100M	100	MH
QAD20V150M	150	MH
QAD20V175M	175	MH
Type III Distribution		
QAD203100H	100	HPS
QAD203150H	150	HPS
QAD203100M	100	MH
QAD203150M	150	MH
QAD203175M	175	MH
Forward Throw Distribution		
QAD20F100H	100	HPS
QAD20F150H	150	HPS
QAD20F100M	100	MH
QAD20F150M	150	MH
QAD20F175M	175	MH

Color Options: Suffix catalog number with **W** for white, **BL** for black, **BZ** for bronze or **G** for gray.

Mounting Options

