

# Lumen Tech

Lighting, LLC.

## Design QPA15

### Designer Wall Pack

Maximum 175W Metal Halide  
150W High Pressure Sodium  
Or 2-42W PLT Compact Fluorescent

#### Specifications

**Housing:** Heavy duty cast aluminum with quick mount system. Powder coated finish. See finish note.

**Lens:** Prismatic borosilicate glass silicone sealed to door frame.

**Reflector:** Anodized aluminum, computer designed for efficiency.

**Ballast: H.I.D.:** Pre-wired C.W.A., H.P.F. core and coil with capacitor. **CF:** Compact fluorescent electronic high power factor class P, universal voltage 120 thru 277 volt; 50/60 Hz.

**Lamp: H.I.D.:** Clear medium base. **CF:** PLT lamp, 4 pin base (by others).

**Lamp Holder: H.I.D.:** High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact.


**CF:** White thermoplastic with snap-in lamp retainer springs.

**Finish:** Bronze, detergent cleaned, prime coated chip resistant powder urethane polyester coating. Contact factory for other colors.

**Photometric Information:** Contact factory.

**Labels:** U/L listed suitable for wet location.

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

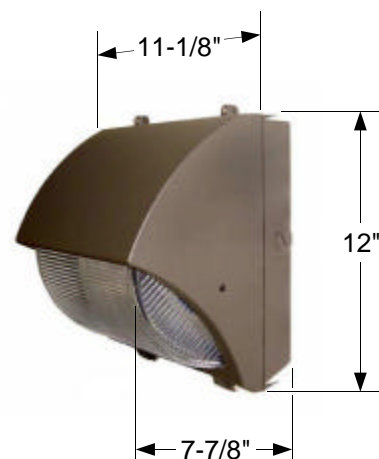

Wireguard option order catalog#  
**QPA15WG.**

#### Ordering Information

Catalog Number	Watts	Light Source
QPA15T26	26	Compact Fluorescent
QPA15T32	32	Compact Fluorescent
QPA15T42	42	Compact Fluorescent
QPA15T226	2-26	Compact Fluorescent
QPA15T232	2-32	Compact Fluorescent
QPA15T242	2-42	Compact Fluorescent
QPA1550H	50	HPS
QPA1570H	70	HPS
QPA15100H	100	HPS
QPA15150H	150	HPS
QPA1550M	50	MH
QPA1570M	70	MH
QPA15100M	100	MH
QPA15150M	150	MH
QPA15175M	175	MH