

Lumen Tech

Lighting, LLC.

Design QPE15 / 25

Designer Wall Pack

Maximum 400W Metal Halide
400W High Pressure Sodium
Or 2-42W PLT Compact Fluorescent

Specifications

Housing: Heavy duty cast aluminum with quick mount system. Powder coated finish. See finish note.

Lens: Prismatic tempered glass silicone sealed to door frame.

Reflector: Anodized aluminum, computer designed for efficiency.

Ballast: H.I.D.: Pre-wired C.W.A., H.P.F. core and coil with capacitor. **CF:** Compact fluorescent electronic high power factor class P, universal voltage 120 thru 277 volt; 50/60 Hz.

Lamp: H.I.D.: Clear medium or mogul base. **CF:** PLT lamp, 4 pin base (by others).

Lamp Holder: H.I.D.: High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact.

CF: White thermoplastic with snap-in lamp retainer springs.

Finish: Bronze, detergent cleaned, prime coated chip resistant powder urethane polyester coating. Contact factory for other colors.


Photometric Information: Contact factory.

Labels: U/L listed suitable for wet location.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Ordering Information

Catalog Number	Watts	Light Source
QPE15T26	26	Compact Fluorescent
QPE15T32	32	Compact Fluorescent
QPE15T42	42	Compact Fluorescent
QPE15T226	2-26	Compact Fluorescent
QPE15T232	2-32	Compact Fluorescent
QPE15T242	2-42	Compact Fluorescent
QPE1570H	70	HPS
QPE15100H	100	HPS
QPE15150H	150	HPS
QPE1570M	70	MH
QPE15100M	100	MH
QPE15150M	150	MH
QPE15175M	175	MH
QPE25250H	250	HPS
QPE25400H	400	HPS
QPE25250M	250	MH
QPE25250MP	250	MH Pulse Start
QPE25325MP	325	MH Pulse Start
QPE25350MP	350	MH Pulse Start
QPE25400M	400	MH
QPE25400MP	400	MH Pulse Start

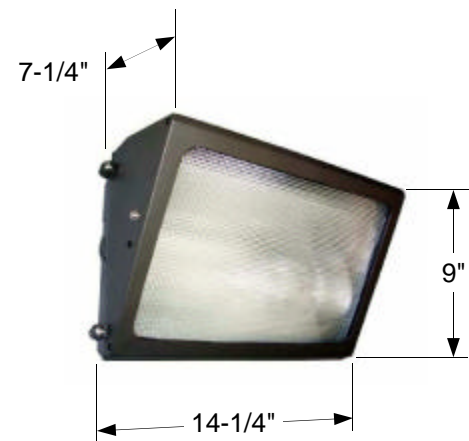

QPE15 Max. 175W MH or 150W HPS
or 2-PLT42W CF

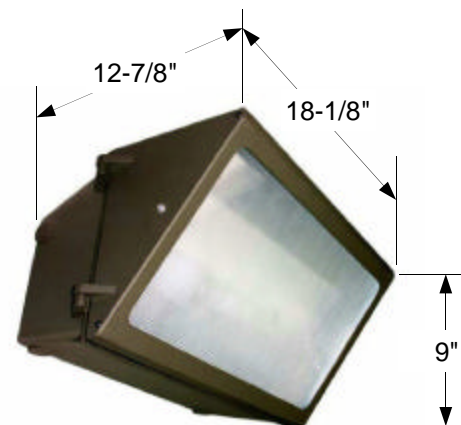

QPE25 Max. 400W MH or 400W HPS