

Lumen Tech

Lighting, LLC.

Design AL50
Surface Mount Area Light
Maximum 175 Watt Metal Halide
Or 150 Watt High Pressure Sodium

Specifications

Housing: Heavy duty cast aluminum. Bronze powder coated finish. See finish note.

Door: Heavy duty cast aluminum hinged to housing, silicone rubber gasket to prevent dirt/water contamination. Finished to match housing. See finish note.

Lens: High impact/heat resistant clear or C73 prismatic glass lens computer designed for wide distribution pattern, silicone sealed to door frame.

Reflector: Anodized aluminum, computer designed in conjunction with the lens for efficiency.

Ballast: Pre-wired C.W.A., H.P.F. core and coil with capacitor.

Lamp: Clear medium base lamp (by others).

Lamp Holder: High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact.

Finish: Bronze, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating. Other colors available contact factory.

Photometric Information: Contact factory.

Labels: U/L, IP65 listed suitable for wet location, under covered canopy applications.



AL50 Shown with clear lens and wireguard option.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Ordering Information


Catalog Number Watts Light Source

Clear Tempered Glass Lens

ALC5050H	50	HPS
ALC5070H	70	HPS
ALC50100H	100	HPS
ALC50150H	150	HPS
ALC5050M	50	MH
ALC5070M	70	MH
ALC50100M	100	MH
ALC50150M	150	MH
ALC50175M	175	MH

C73 Prismatic Glass Lens

ALP5050H	50	HPS
ALP5070H	70	HPS
ALP50100H	100	HPS
ALP50150H	150	HPS
ALP5050M	50	MH
ALP5070M	70	MH
ALP50100M	100	MH
ALP50150M	150	MH
ALP50175M	175	MH

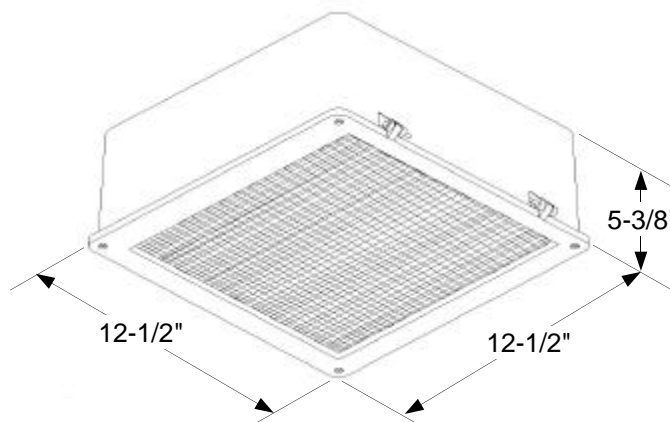

Options and Accessories

Suffix Cat.# With

AL50WG	Wireguard
AL50PC	Polycarbonate Shield
QRZ	Quartz Restrike