

# Lumen Tech

Lighting, LLC.

## Design PM28S Slip-Fitter Mount Area Light Maximum 400W Metal Halide Or High Pressure Sodium

### Specifications

**Housing:** Die cast aluminum construction with corrosion resistant hardware. Adjustable 2-3/8" tenon slip-fitter mount. See finish note.

**Door Frame:** Die cast aluminum, one piece silicone gasket, seals door frame to housing. See finish note.

**Lens:** Impact resistant clear tempered glass, silicone caulked to door frame.

**Reflector:** Anodized aluminum, designed for maximum efficiency, type III distribution.

**Ballast:** Pre-wired C.W.A., H.P.F. core and coil with capacitor.

**Lamp:** Clear mogul base, (by others).

**Lamp Holder:** High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact.

**Finish:** Dark Bronze, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating.

**Photometric Information:** Contact factory.

**Labels:** U/L, CUL listed suitable for wet location.




*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

### Ordering Information

Catalog Number	Watts	Light Source
PM28S100H	100	HPS
PM28S150H	150	HPS
PM28S250H	250	HPS
PM28S400H	400	HPS
PM28S100M	100	MH
PM28S150M	150	MH
PM28S175M	175	MH
PM28S250M	250	MH
PM28S400M	400	MH

### Options & Accessories

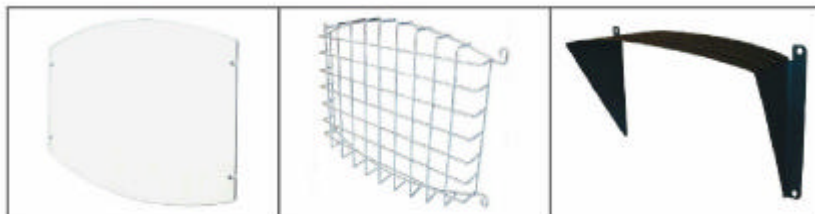

PM28SSH  
Polycarbonate Shield

PM28SWG  
Wire Guard

PM28SV  
Visor Shield

