

Lumen Tech

Lighting, LLC.

Design PM28Y Yoke Mount Area Light Maximum 400W Metal Halide Or High Pressure Sodium

Specifications

Housing: Die cast aluminum construction with corrosion resistant hardware. Adjustable yoke mount. See finish note.

Door Frame: Die cast aluminum, one piece silicone gasket, seals door frame to housing. See finish note.

Lens: Impact resistant clear tempered glass, silicone caulked to door frame.

Reflector: Anodized aluminum, designed for maximum efficiency, type III distribution.

Ballast: Pre-wired C.W.A., H.P.F. core and coil with capacitor.

Lamp: Clear mogul base, (by others).

Lamp Holder: High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact.

Finish: Dark Bronze, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating.

Photometric Information: Contact factory.

Labels: U/L, CUL listed suitable for wet location.




SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Ordering Information

Catalog Number	Watts	Light Source
PM28Y100H	100	HPS
PM28Y150H	150	HPS
PM28Y250H	250	HPS
PM28Y400H	400	HPS
PM28Y100M	100	MH
PM28Y150M	150	MH
PM28Y175M	175	MH
PM28Y250M	250	MH
PM28Y400M	400	MH

Options & Accessories

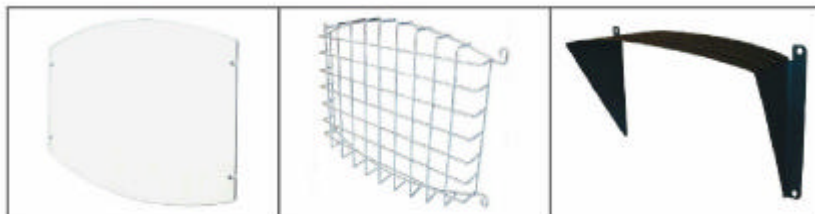

PM28YSH
Polycarbonate Shield

PM28YWG
Wire Guard

PM28YV
Visor Shield

