

Lumen Tech

Lighting, LLC.

Design WP352

Surface Mount Wall Pack

Maximum 50 Watt Metal Halide

70 Watt High Pressure Sodium

Or 42W PLT Compact Fluorescent

With 1/2" Hole For Optional Photo Cell

Specifications

Housing: High impact polycarbonate lens and housing finished bronze.

Reflector: Anodized aluminum, computer designed in conjunction with the lens for efficiency.

Ballast HID: Pre-wired C.W.A., H.P.F. core and coil with capacitor. **CF:** Compact fluorescent electronic high power factor class P, universal voltage 120V—277V 50 / 60 Hz.



Lamp HID: Clear medium base lamp. **CF:** PLT max 42W, 4 pin base. (by others).

Lamp Holder HID: High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact. **CF:** White thermoplastic with snap-in lamp retainer springs.

Photometric Information: Contact factory.

Labels: U/L, CUL listed suitable for wet location.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

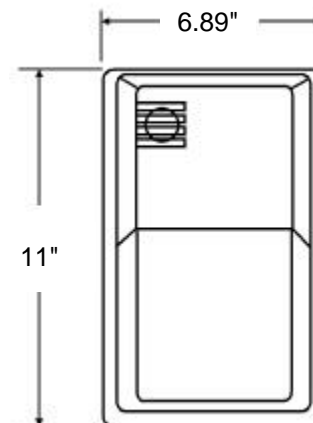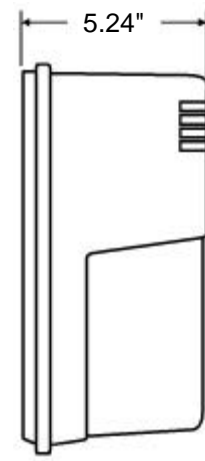

Ordering Information

Catalog Number	Watts	Light Source
WP35250H	50	HPS
WP35270H	70	HPS
WP35250M	50	MH
WP352T26	26	Compact Fluorescent
WP352T32	32	Compact Fluorescent
WP352T42	42	Compact Fluorescent