

Lumen Tech

Lighting, LLC.

Design WP353

Surface Mount Wall Pack

Maximum 100 Watt Metal Halide

100 Watt High Pressure Sodium

Or 42W PLT Compact Fluorescent

With 1/2" Hole For Optional Photo Cell

Specifications

Housing: Die-cast aluminum housing with high impact borosilicate glass lens for maximum light distribution. Finished dark bronze. See finish note.

Reflector: Anodized aluminum, computer designed in conjunction with the lens for efficiency.

Ballast HID: Pre-wired C.W.A., H.P.F. core and coil with capacitor. **CF:** Compact fluorescent electronic high power factor class P, universal voltage 120V—277V 50 / 60 Hz.

Lamp HID: Clear medium base lamp. **CF:** PLT max 42W, 4 pin base. (by others).


Lamp Holder HID: High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact. **CF:** White thermoplastic with snap-in lamp retainer springs.

Finish: Bronze, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating.

Photometric Information: Contact factory.

Labels: U/L, CUL listed suitable for wet location.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

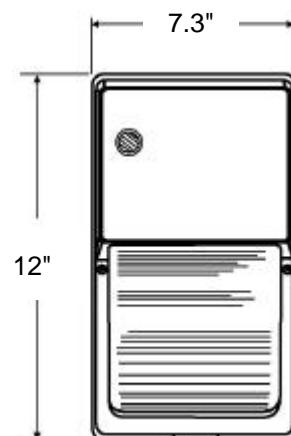

Ordering Information

Catalog Number	Watts	Light Source
WP35350H	50	HPS
WP35370H	70	HPS
WP353100H	100	HPS
WP35350M	50	MH
WP35370M	70	MH
WP353100M	100	MH
WP353T26	26	Compact Fluorescent
WP353T32	32	Compact Fluorescent
WP353T42	42	Compact Fluorescent